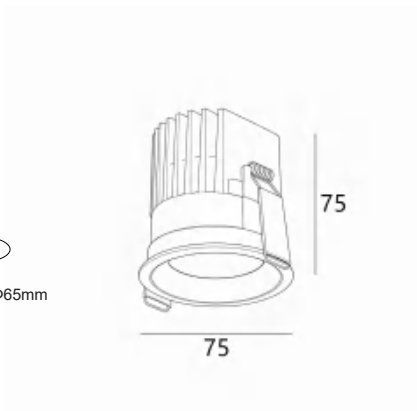


Product series	LED Downlight
Application areas	Accent Lighting
Pan/tilt range	Fixed
Mounting	Recessed
Lighting technology	LED
LED Luminous Flux Class	120LW/W
Light colour White	2700K, 3000K,3500K, 4000K
Cooling	Passive
Supply unit	Driver Separated
Luminaire colour	RAL 9005 jet black RAL 9006 white aluminium RAL 9016 traffic white Special colours on request
Surface	Structure powder-coated
Nominal voltage	100-240V,50/60Hz
Lighting controls	On Request
Weight	Approx. 0.3kg
Test seal	





 Cut out
 Diam. Ø65mm



Code composition/ Composizione del codice

Model	Power	Light flux	Cut-off size	Size	Beam Angle	CRI	Function
GMT055-R	7W	120LM/W	Ø65mm	Ø75*75mm	15 24 36 60D	90	ON/OFF DIM/DALI/0-10V ZIGBEE CASAMBI

70°-3000K-CRI90



Product series	LED Downlight
Application areas	Accent Lighting
Pan/tilt range	Fixed
Mounting	Recessed
Lighting technology	LED
LED Luminous Flux Class	120LW/W
Light colour White	2700K, 3000K,3500K, 4000K
Cooling	Passive
Supply unit	Driver Separated
Luminaire colour	RAL 9005 jet black
	RAL 9006 white aluminium
	RAL 9016 traffic white
	Special colours on request
Surface	Structure powder-coated
Nominal voltage	100-240V,50/60Hz
Lighting controls	On Request
Weight	Approx. 0.3kg
Test seal	




 Cut out
 Diam.Φ75mm



Code composition/ Composizione del codice

Model	Power	Light flux	Cut-off size	Size	Beam Angle	CRI	Function
GMT055-R	12W	120LM/W	Φ75mm	Ø82*H85mm	15 24 36 60D	90	ON/OFF DIM/DALI/0-10V ZIGBEE CASAMBI

70°-3000K-CRI90

