



ARCHI

The ARCHI Series redefines versatility in architectural lighting with its wide 40-degree lateral adjustment—surpassing the standard 30-degree tilt found in conventional down-lights.

This innovative design ensures seamless alignment on sloped ceilings, offering greater installation freedom while maintaining a clean, streamlined aesthetic.

Engineered for precision, the ARCHI Series delivers a soft, uniform light distribution, eliminating harsh edges for a flawless illuminated effect. Ideal for spaces where flexibility and visual comfort are paramount.



WIDELY ROTATION
355°turning range , 180°swivel range



FLEXIBLE INSTALLATION



RA
High CRI up to 97



FOOD



FASHION



SHOP




AUTOMOBILE

Product series	ARCHI
Application areas	Accent lighting
Pan/tilt range	Tilt
Mounting	Recessed
Lighting technology	LED
LED Luminous Flux Class	120LM/W
Light colour White	2700K, 3000K, 3000K - Efficient White, 3000 K - Brilliant Colour,3500K, 4000K
Cooling	Passive
Supply unit	Driver Separated
Luminaire colour	RAL 9005 jet black RAL 9006 white aluminium RAL 9016 traffic white Special colours on request
Surface	Structure powder-coated
Nominal voltage	100-240V,50/60Hz
Lighting controls	On Request
Weight	0.25kg
Test seal	ERL CE IP20    TM-21 100,000





 Cut out
 Diam.Ø55mm

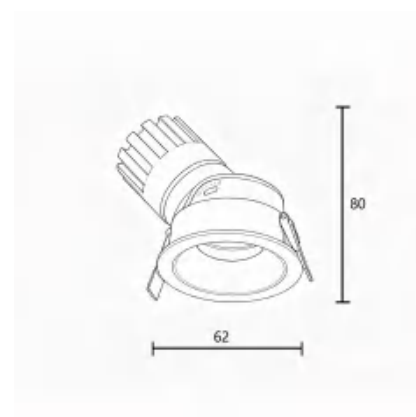


Code composition/ Composizione del codice

Model	Power	Cut-off size	Size	Beam Angle	CRI	Function
GMC115	9W	Ø55mm	Ø62*H80mm	15/24/36D	90/98	ON/OFF DIM/DALI/0-10V ZIGBEE

24°-3000K-CRI90




36°-3000K-CRI90



Product series	ARCHI
Application areas	Accent lighting
Pan/tilt range	Tilt
Mounting	Recessed
Lighting technology	LED
LED Luminous Flux Class	120LM/W
Light colour White	2700K, 3000K, 3000K - Efficient White, 3000 K - Brilliant Colour,3500K, 4000K
Cooling	Passive
Supply unit	Driver Separated
Luminaire colour	RAL 9005 jet black RAL 9006 white aluminium RAL 9016 traffic white Special colours on request
Surface	Structure powder-coated
Nominal voltage	100-240V,50/60Hz
Lighting controls	On Request
Weight	0.25kg
Test seal	EAC CE IP20 SECM C 2 TM-21 100,000





 Cut out
 Diam.Ø75mm



Code composition/ Composizione del codice

Model	Power	Cut-off size	Size	Beam Angle	CRI	Function
GMC115	12W	Ø75mm	Ø82*H100mm	15/24/36D	90/98	ON/OFF DIM/DALI/0-10V ZIGBEE

24°-3000K-CRI90



36°-3000K-CRI90

